




High-performance solution, ideal for large sliding and industrial gates in continuous duty conditions.

- Range designed for high-performance and functionality in complete safety, for a variety of uses, including industrial, and continuous duty.
- All BKV motors feature the new "Adaptive Torque Technology" to ensure lasting, smooth, constant speed during movement.
- Control board, with separate terminal blocks and graphical display, for simpler installing and diagnosing. Can store up to 250 users.
- Four safety inputs which can be configured to directly manage the (8k2Ω) resistive sensitive safety-edges.
- Set up to run CAME KEY and to connect to the cloud via CAME Connect.
- New quick-release lever for emergencies.
- On-board Rolling Code and (Twin) Key Code radio-frequency decoding.
- It manages RIO System 2.0 wireless safety accessories via the 806SS-0040 accessory.
- The R800 accessory lets you directly manage CAME keypads, while the R700 lets you connect CAME transponder selectors.

Dimensions (mm)

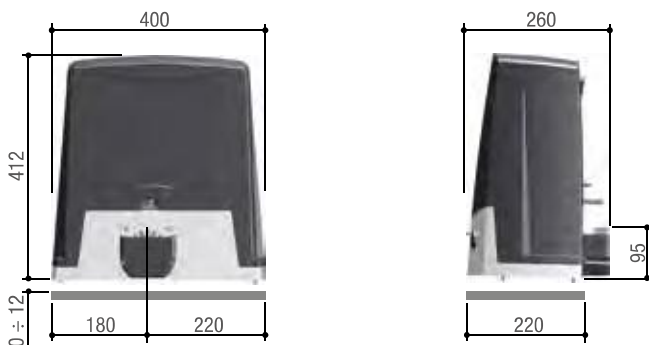

Operational limits

MODELS	801MS-0350	801MS-0360	801MS-0370
Max. length of leaf (m)	20	20	20
Max. weight of leaf (kg)	1500	2000	2500

Technical characteristics

MODELS	801MS-0350	801MS-0360	801MS-0370
Protection rating (IP)	44	44	44
Power supply (V - 50/60 Hz)	230 AC	230 AC	230 AC
Power supply to motor (V)	36 DC	36 DC	36 DC
Absorption (A)	8	9	10
Maneuvering speed (m/min)	12	12	12
Duty/cycle (%)	HEAVY-DUTY SERVICE	HEAVY-DUTY SERVICE	HEAVY-DUTY SERVICE
Power (W)	200	250	300
Thrust (N)	800	900	1000
Operating temperature (°C)	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55