

5MP AHD HA-DVR-5108/16-L

FEATURES

- H.265+ dual-stream video compression
- Supports HDCVI/TVI/AHD/CVBS video inputs
- Long transmission distance over coax cable
- Supports 1 SATA HDD, up to 10TB



Supercharge your security system with Honeywell's AHD recorder technology for High Definition 5 MP images over your existing coax infrastructure. Our newest AHD DVRs use an over-coaxial cable analog HD video transmission standard to allow long-distance HD transmission at a lower cost. The AHD 5MP DVRs are the economic alternative for achieving HD video surveillance while retaining your existing BNC cables and cameras.

SAFETY FEATURES

- Configurable motion detection and camera tamper detection settings, including configurable event notifications, such as automatic emails (with attached video or snapshot) and automatic alerts (such as buzzers).
- Remote configuration and firmware updating through Honeywell Viewer web client and the Honeywell Config tool. Password-protected access to the camera's and DVR's video and network setup.
- Bidirectional communication for the DVR.

EASY TO USE

- The Quick wizard and plug-and-play (like traditional DVRs and analog cameras) make setup fast and easy.
- Physical installation within minutes with the help of a comprehensive and easy-to-understand quick installation guide.

FULLY-FEATURED DVRs



High decoding capability for full HD viewing.



H.265+ video compression.



DVR supports multi format AHD/CVI/TVI/CVBS video input.



Simultaneous HDMI/VGA video output.

DYNAMIC, ACCESSIBLE MONITORING

- Monitor from anywhere using the mobile apps for iOS and Android devices.
- The DVR support feature of smart search (search for video that was recorded because motion was detected in a selected area).

MARKET OPPORTUNITIES

- The AHD 5MP DVRs' technology makes these recorders perfect for installations where you want HD-quality video while still using your existing coax infrastructure.
- These AHD DVRs also deliver higher quality video than current 960H analog systems, but at a similar cost.

5MP AHD HA-DVR-5108/16-L

TECHNICAL SPECIFICATIONS

SYSTEM

Main Processor	Embedded Processor
Operating System	Embedded LINUX

VIDEO AND AUDIO

Analog Camera Input	8/16 Channel, BNC
AHD Camera	5MP, 4MP, 1080P@25/30, 720P@25/30fps
CVBS Camera	PAL/NTSC
Audio In/Out	1/1, RCA
Two-way Talk	Reuse audio in/out, RCA

RECORDING

Video Compression	H.265+/H.265/H.264+/H.264
Resolution	5M-N, 4M-N, 1080P, 1080N, 720P, 960H, D1, CIF
Record Rate	Main stream:5M-N(1~10fps), 4M-N/1080P(1~15fps), 1080N/720P/960H/D1/CIF (1~25/30fps) Sub stream: D1/CIF(1~15fps)
Video Bit Rate	32Kbps ~ 6144Kbps Per Channel
Record Mode	Manual, Schedule (General, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Record Interval	1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec
Audio Compression	AAC(only for the 1st channel), G.711A, G.711U, PCM
Audio Sample Rate	8KHz, 16 bit Per Channel
Audio Bit Rate	64Kbps Per Channel

DISPLAY

Interface	1 HDMI ,1 VGA
Resolution	HDMI: 8CH: 1920×1080, 1280×1024, 1280×720 16CH: 3840×2160, 2560×1440, 1920×1080, 1280×1024, 1280×720 VGA: 1920×1080, 1280×1024, 1280×720
Multi-screen Display	When IP extension mode not enabled: 8CH: 1/4/8/9 16CH: 1/4/8/9/16 When IP extension mode enabled: 8CH: 1/4/8/9/16 16CH: 1/4/8/9/16/25

OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
-----	--

NETWORK

Ethernet	8CH: 1 RJ-45 Port (100M) 16CH: 1 RJ-45 Port (1000M)
Network Function	HTTPS; TCP/IP; IPv4/IPv6; UPnP; RTSP; UDP; SMTP; NTP; DHCP; DNS; IP filter; PPPoE; DDNS; FTP; IP Search
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android (phone and tablet)
Interoperability	ONVIF Conformant

VIDEO DETECTION AND ALARM

Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 × 18), Video Loss, Tampering and Diagnosis

PLAYBACK AND BACKUP

Playback	8CH: 1/4/9 16CH: 1/4/9/16
Search Mode	Time/Date; Alarm; Motion Detection; Exact Search (accurate to a second)
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB Device/Network

ELECTRICAL

Power Supply	DC12V/1.5A
Power Consumption (without HDD)	8CH:<10W 16CH:<15W

PHYSICAL

Dimensions	Compact 1U, 260×236×48mm(10.2"×9.3"×1.9")
Net Weight(without HDD)	8CH:1.0kg (2.6 lb) 16CH:1.1kg(2.9 lb)

STORAGE

Internal HDD	1 SATA Port, up to 10TB capacity
--------------	----------------------------------

AUXILIARY INTERFACE

USB	8CH:2 USB 2.0 16CH:1 USB 2.0 , 1 USB 3.0
RS485	1 Port, for PTZ Control

5MP AHD HA-DVR-5104-L


ENVIRONMENTAL	
Operating Conditions	-10°C ~ +55°C (+14°F ~ +131°F), 10~ 90% RH RH
Storage Conditions	-20°C ~ +70°C (-4°F ~ +158°F), 0~ 90% RH
CERTIFICATIONS	
Certifications	BIS certified, CE, FCC

Ordering Information

TYPE	PART NUMBER	DESCRIPTION
DVR	HA-DVR-5108-L	8ch, 5MP DVR, 1 SATA, H.265+
DVR	HA-DVR-5116-L	16ch, 5MP DVR, 1 SATA, H.265+


Dimensions (mm)

HA-DVR-5108-L

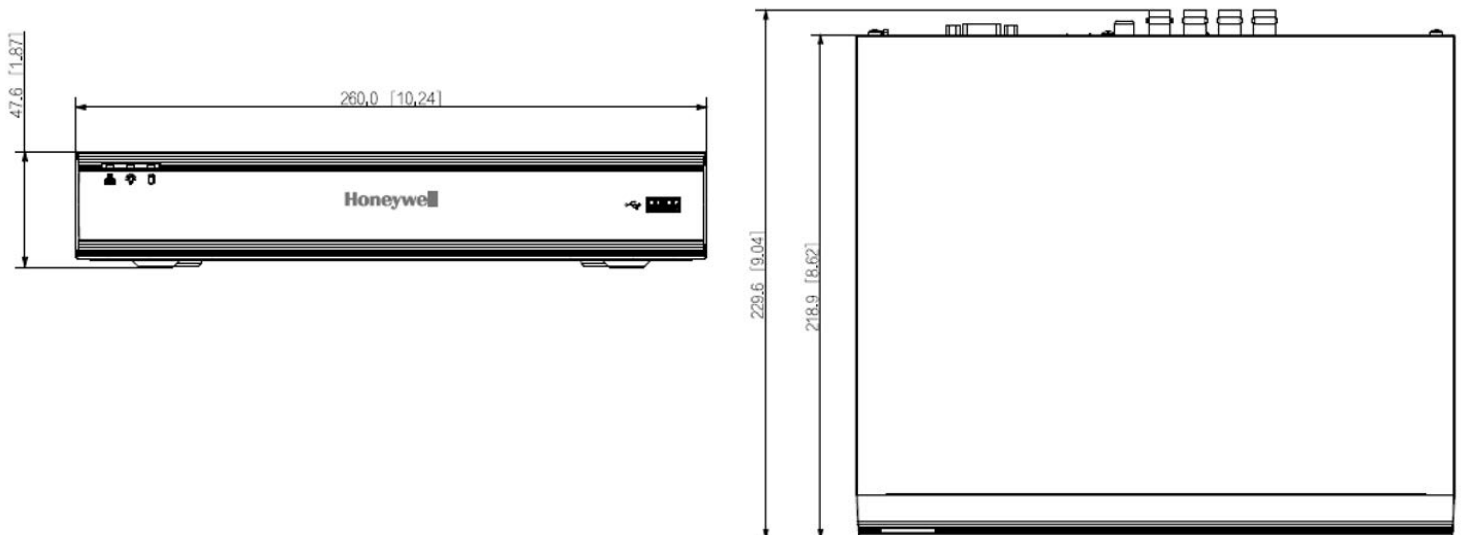

5MP AHD HA-DVR-5104-L

HA-DVR-5116-L

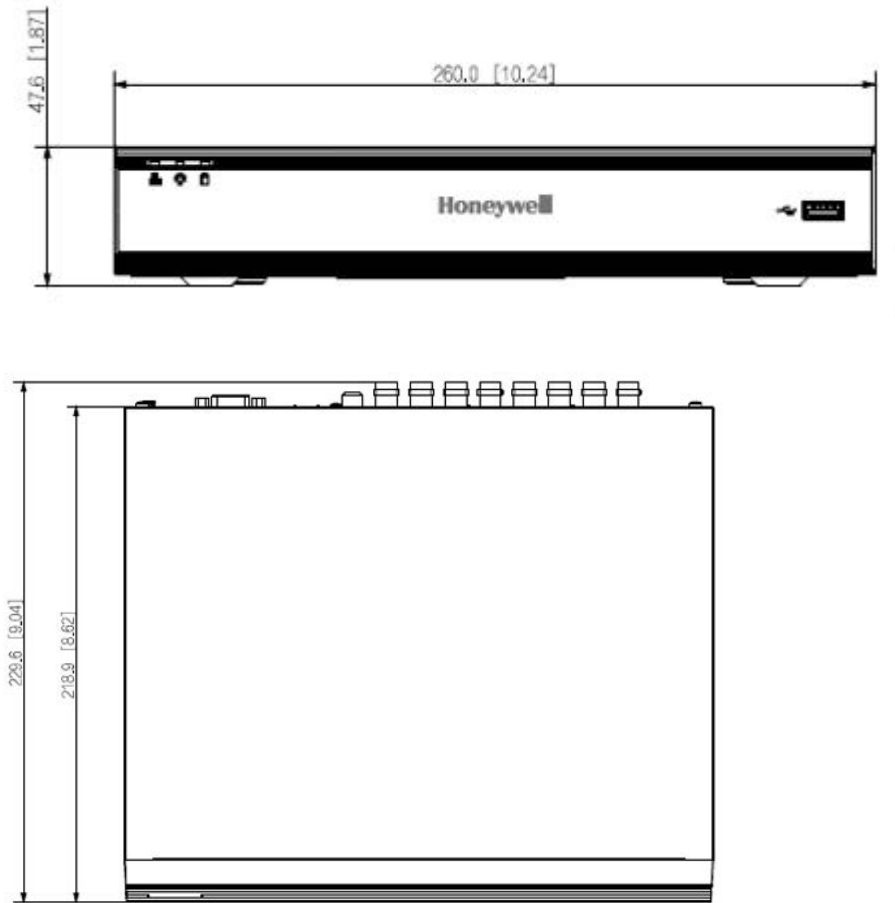

For more information,

<https://www.security.honeywell.com>

<https://honeywellbuildings.in>

Tel : +91 124 4975000

Email: HBT-Indiabuildings@honeywell.com

Honeywell HBT India Buildings

Unitech Trade Center, 5th Floor, Sector-43,

Block C, Sushant Lok Phase - I, Gurugram -

122 002

Haryana India

www.honeywell.com

© 2020 Honeywell International Inc.

5MP AHD
HA-DVR-5108/16-L

Honeywell