

I-HADC-5005PI-L

I-HABC-5005PI-L

I 5MP AHD IR Dome Camera

Featuring the advanced Analog High Definition (AHD) video technology, I-HADC-5005PI-L/I-HABC-5005PI-L is a HD analog camera which provides 1080P (1920 X 1080) sharp, high definition images. The AHD technology ensures real-time and non compressed signal transmission via coaxial cable, which significantly reduces installation cost and provides much sharper images without video quality loss.



I-HADC-5005PI-L

I 5MP AHD IR Bullet Camera

The I-HADC-5005-L/I-HABC-5005PI-L cameras are cost effective surveillance solutions suitable for both indoor and outdoor applications, including schools, colleges, hostels, hospitals, commercial sites, retail stores, warehouses, banks and so on. Featuring 3.6mm built-in lens, 1080P resolution, TDN function and IR night vision. It is also ideal for easy and cost effective upgrade of existing analog system to high definition surveillance.



I-HABC-5005PI-L

FEATURES AND BENEFITS



- 5MP high resolution



- CMOS progressive scan



- True day/night capability




- Minimum illumination: 0 Lux (IR ON)



- TDN (IR-cut), AWB, AGC, Defog



- 3.6mm lens



- IR distance: upto 20 meters



- Power: 12VDC




- 4 in 1, AHD,TVI,CVI, CVBS output

SPECIFICATIONS

| SPECIFICATIONS | | |
|-----------------------------|--|-----------------------------|
| CAMERA | I-HADC-5005PI-L | I-HABC-5005PI-L |
| Signal System | PAL Up to 25FPS | |
| Image Sensor | 1/2.7" Progressive Scan Digital Image Sensor | |
| Effective Pixel | 2560x1920, 5 MP | |
| Horizontal Resolution | 5MP@25FPS, 1080P@25 FPS, 720P@25FPS | |
| IR | IR Distance up tp 20M | |
| Lens Furnished | 3.6mm,5 Mega Pixel Lens | |
| Lens Interface | M12 | |
| Signal/Noise Ratio | More than 60dB | |
| Shutter Control | 1/50 sec to 1/10,000 sec | |
| Min Illumination | 0.001Lux @ (F1.2,AGC ON),0 Lux (IR LED On) | |
| Synchronisation | Internal | |
| White Balance | Auto | |
| Back Light Compensation | Auto | |
| Gain Control | Auto | |
| Video Output Signal | Switchable video signal: HD-TVI/AHD/HD-CVI/CVBS | |
| Transmission Distance | Up to 500m over coaxial cable* | |
| Operating Conditions | -10°C ~ +60°C, Humidity 90% or less (non-condensing) | |
| Power Supply | DC 12V ± 10% | |
| Current , Power Consumption | 250mA , Max 3.5W | |
| Dimension (Lxwxh) , Weight | 145mm x 140mm x 120mm , 460g | 200mm x 120mm x 80mm , 500g |
| Housing | Plastic | |
| Safety | NA | IP66 Compliance |

Note: Honeywell reserves the right, without notification, to make changes in product design and/or specifications.

DIMENSIONS

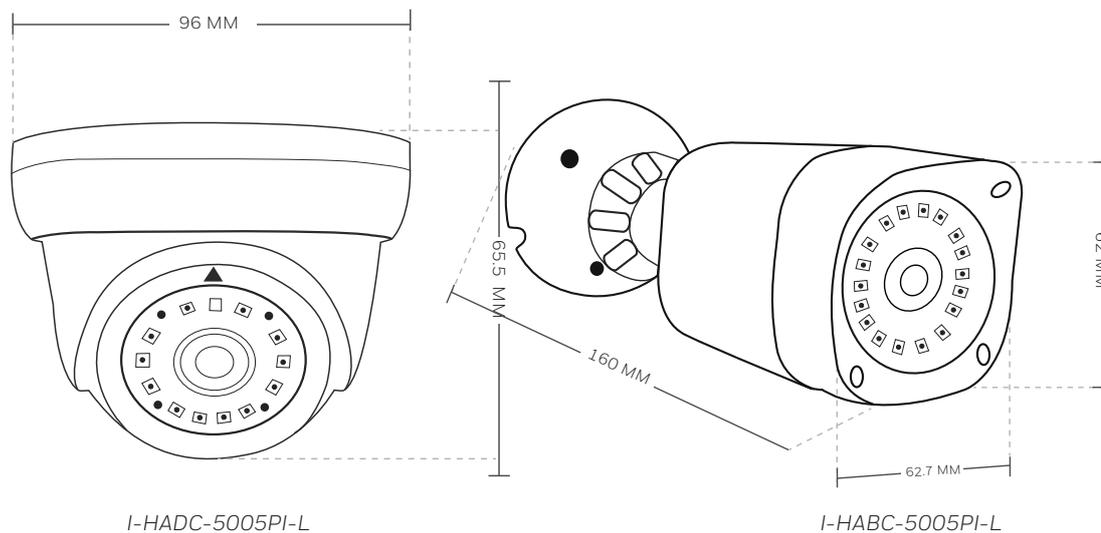

For more information,

www.honeywellbuildings.in

Call: 000-8000-502167

Email: enquiry.mms@honeywell.com

Honeywell HBT India Buildings

Unitech Trade Center, 5th Floor, Sector-43,
Block C, Sushant Lok Phase - I,
Gurgaon - 122 002.

I-HADC-5005PI-L
I-HABC-5005PI-L | 01 | 09/21
© 2021 Honeywell International Inc.

IMPACT
by Honeywell