

I-HDPTZ220

I-HDPTZ236

20x and 36x 2MP IR HD PTZ Bullet

Honeywell is extending its AHD 1080p camera series by introducing two PTZ cameras that are designed for outdoor surveillance in extreme environment. Featuring 2MP IR Bullet PTZ with 20x and 36x optical zoom option to cater to different kinds of applications as per the customers requirement.

The PTZ also provides considerably wide coverage to capture high resolution vivid images. Its 360° continuous rotation and the 20x, 36x zoom lens give you a full picture of the area under surveillance in optimal width and depth. This high performance camera is housed by IP66 dome enclosure to prevent the camera from dust and rain. Whether it is installed indoor in warehouses and loading docks, or in an outdoor area with unexpected weather conditions, the PTZ always stays protected in any environment.

MARKET OPPORTUNITIES

Honeywell AHD 2MP PTZ is designed for high quality surveillance applications at an economical price. It is ideal for different applications where large coverage area is required that can be accomplished by one PTZ camera in places such as car parks, highways, hotels, restaurants, shopping malls, hospitals, residential areas, commercial buildings, education facilities and so on.

FEATURES AND BENEFITS



- 1/2.9" for 20x and 1/2.8" for 36x - SONY 2 MP CMOS Sensor



- 20X 4.7mm~96.3mm 36X 4.6mm~167mm



- IR Distance of max Up to 150M for 20x & 36x



- IP66 outdoor



I-HDPTZ220




I-HDPTZ236

SPECIFICATIONS

SPECIFICATIONS		
CAMERA	I-HDPTZ220	I-HDPTZ236
Effective Pixel	2MP 1920*1080	
Lens Furnished	20X f=4.7mm~96.3mm	36X 4.6mm~167mm
Rotation Range	Pan: 0°~360°, Tilt: 0°~93°	
Rotation Speed	Pan: 0~80°/s, Tilt: 0~40°/s	
Auto Flip	Support	
Preset Points	220pcs preset(Dwell time 01-60s interval available)	
A-B Scan	User programmable (scan speed 1-64 levels setting available)	
Guard Tour	3 groups (Max.16 points, dwell time user selectable)	
Pwr On Action	Memory/Tour 1/360° scan/A-B scan/Park 1/None	
Video Interface Output	AHD/TVI/CVI/CVBS selectable	
Transmission Distance	Up to 500m over coaxial cable	
Communication Mode	RS485 (+/-) / coaxial cable	
Operating Conditions	-40°C~+60°C	
Power Supply	DC12V 3A	
Current , Power Consumption	≤ 25W	
IR	Up to 150 meters	
Leds	4pcs LED+4pcs Laser LED	
Housing	Metal	
Safety	IP66 Compliance	

Note: Honeywell reserves the right, without notification, to make changes in product design and/or specifications.

DIMENSIONS

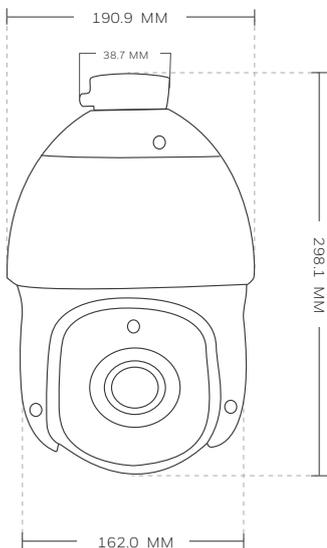

I-HDPTZ220 I-HDPTZ236

For more information,

www.honeywellbuildings.in
 Call: 000-8000-502167
 Email: enquiry.mms@honeywell.com

Honeywell HBT India Buildings

Unitech Trade Center, 5th Floor, Sector-43,
 Block C, Sushant Lok Phase - I,
 Gurgaon - 122 002.

I-HDPTZ220
 I-HDPTZ236 | 01 | 09/21
 © 2021 Honeywell International Inc.

IMPACT
 by Honeywell